




LED Undercabinet Light

Ultra Slim



Direct Connector



90° Direct Connector¹

UC-LED



EACH UNIT INCLUDES:

- 1 - Fixture
- 1 - Direct Connector
- 1 - Cable Connector
- 2 - Mounting plates



AVAILABLE IN 3 LENGTHS:

- 300mm (11.81"), 500mm (19.69"), 1000mm (39.37")
- ULTRA THIN DEPTH: 8mm (.315")
- WIDTH: 33mm (1.3")



- NATURAL WHITE (4000K)
- or
- WARM WHITE (3000K)

** Power Supply and accessories sold separately (see back)*

DESCRIPTION

UC Ultra slim model can be combined with the UCT Triangular model and UCP Pucklight.

Link up to 3m (9.84ft) and/or 36 watts on one power source.

Available in Natural White (NW-4000K) or Warm White (WW-3000K)

LEDs have a greater than 50,000 hour life

Voltage 24DC

Easy installation – Hardwire or plug-in power supply required. (see back)

Dimming option available when using a standard TRIAC dimmer and hardwire installation. If using a plug-in power supply, a separate dimmer controller is available.

APPLICATION

Multiple uses include shelving, under cabinets, bookcases, walls and task lighting

Installation and ordering information on reverse.

¹ Available separately.




LED Undercabinet Light

Ultra Slim




INSTALLATION DIAGRAM

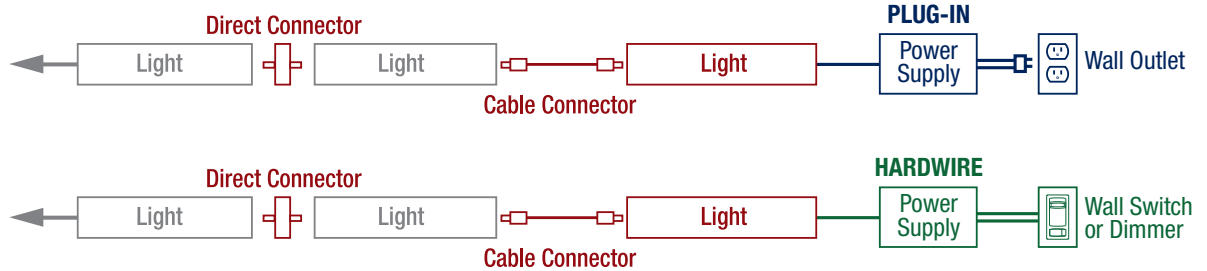

POWER SUPPLY REQUIREMENT

PRODUCT	# PIECES		WATTAGE		TOTAL WATTAGE
UC-LED-300		x	3 Watts	=	
UC-LED-500		x	5 Watts	=	
UC-LED1000		x	11 Watts	=	

LIGHT PATTERN

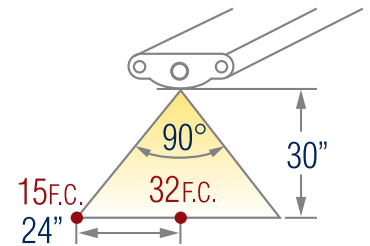

*** IMPORTANT ***
EACH SERIES RUN
MUST NOT EXCEED
36WATTS

ORDERING INFO

PRODUCT	PROD #	DESCRIPTION	WATT	DIMENSIONS
Natural White Unit * 4000K	88861	UC-LED300-NW	3W	L-300mm
	88862	UC-LED500-NW	5W	L-500mm
	88863	UC-LED1000-NW	11W	L-1000mm
Warm White Unit * 3000K	88875	UC-LED300-WW	3W	L-300mm
	88876	UC-LED500-WW	5W	L-500mm
	88877	UC-LED1000-WW	11W	L-1000mm
Plug-in Power Supply	88864	UC-6W Power Supply	6W	L-45mm x W-25mm x D-31mm
	88865	UC-12W Power Supply	12W	L-68mm x W-25mm x D-50mm
	88866	UC-24W Power Supply	24W	L-96mm x W-30mm x D-45mm
	88867	UC-36W Power Supply	36W	L-96mm x W-30mm x D-45mm
Hardwire Power Supply	89097	UC/A LED DRIVER 40W 24VDC DIM	40W	
	89098	UC/A LED DRIVER 60W 24VDC DIM	60W	
	89099	UC/A LED DRIVER 96W 24VDC DIM	96W	
Dimmer (for plug-in power supply)	88872	UC-Dimmer Controller		L-85mm x W-25.4mm x D-12.7mm
On/Off Switch	88871	UC-Switch Connector		L-33mm x W-33mm x D-8mm
Output Receptacle (splitter)	88873	UC RCPT DC 4 (Allows you to split the low voltage power into 4 separate runs)		
	88874	UC RCPT DC 8 (Allows you to split the low voltage power into 8 separate runs)		
Cable Connector	88868	UC-Connector Cable		L-1m Cord
Corner Connector	88869	UC-Corner Connector 90°		W-45mm

* EACH UNIT INCLUDES: (1) fixture, (1) direct connector, (1) cable connector, (2) mounting plates and (2) screws

² For use with multiple run applications. Output receptacle (splitter) is required to tie in runs to 100W or 150W transformer



Visit rabdesign.ca to view our entire collection.

RAB Design Lighting Inc. 222 Islington Ave., Toronto, ON M8V 3W7
 TEL. 416-252-9454 / 800-268-0381 | FAX. 416-252-9664 / 800-668-5517

