

The WL-LED15 is an energy efficient wall light for outdoor use that replaces up to a 70W HPS fixture.



### APPLICATIONS

**Ideal for a variety of outdoor applications such as entrances, backdoors, mandors, walkways and aisles.**

<b>Project</b>	
<b>Type</b>	
<b>Date</b>	
<b>Notes</b>	

### SPECIFICATIONS

#### Construction

Die cast aluminum housing and frame with a clear lens and specular reflector. The WL-LED15 has a chip and fade resistant polyester powder coat paint finish.

#### LED Configuration

The fixture contains one high efficiency chip on board (COB) that delivers a total lumen output of 1,274 lumens at an efficiency of 83 lumens/watt.

#### Electrical

Total system wattage of the unit is 15W. The standard unit has a high efficiency driver that operates at 120 - 277V. 347 is available as an option with back box only.

#### Options

- Backbox for surface or flush mounting using conduit.
- Photocell (factory installed)


#### Finish

Bronze, White, Mirror Black

<b>Fixture Watts</b>	<b>15W</b>
<b>Lumens</b>	<b>1,274</b>
<b>Efficacy</b>	<b>83 lumens/watt</b>

<b>LED Life</b>	<b>100,000 hours</b>
<b>Colour Temperature</b>	<b>4000K (standard) 3000K (option) 5000K (option)</b>
<b>Warranty</b>	<b>5 Years</b>
<b>Operating temperature</b>	<b>-40°C to +40°C</b>
<b>CRI</b>	<b>&gt;80</b>
<b>Total Harmonic Distortion</b>	<b>&lt;20%</b>
<b>Power Factor</b>	<b>0.99</b>

### DIMENSIONS

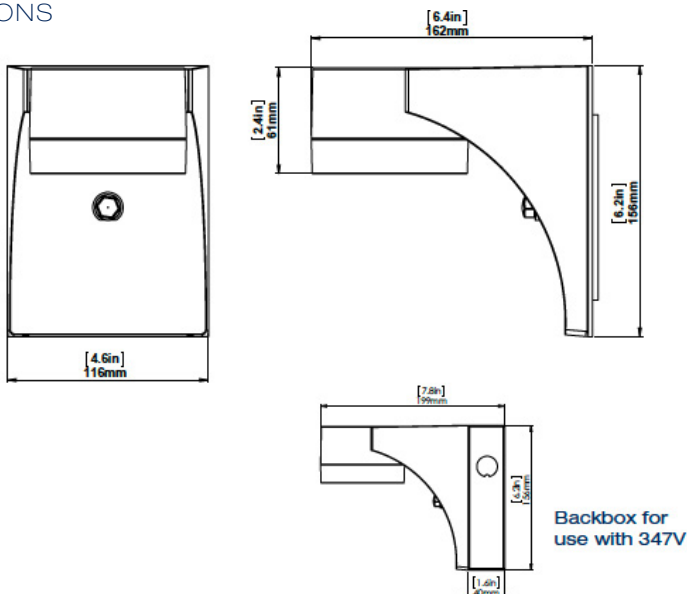

---

ORDERING GUIDE



**VOLTAGE**

**B - 120 - 277V\***  
**C - 347**

**COLOUR TEMP**

**4K - 4000K\***  
**5K - 5000K**  
**3K - 3000K**

**FINISH**

**BRZ - BRONZE\***  
**WHT - WHITE**  
**MBK - MIRROR BLACK**

**OPTIONS**

**BB - BACK BOX\***  
**PC - PHOTOCCELL**

\* Standard configuration

\*\* For use with 347V