

The VCS and LG Series of fixtures are elegantly designed, gooseneck fixtures that provide bright, even illumination for signs.



| | |
|----------------|--|
| Project | |
| Type | |
| Date | |
| Notes | |

APPLICATIONS

Ideal for sign and accent lighting in retail and commercial applications.

SPECIFICATIONS

Construction

Shades, arms and mounting plate are made of aluminum with a durable powder coat paint finish. A 14W painted aluminum LED fixture is attached inside the shades. Various combinations of fixtures and arms can be combined in custom colours. An optional swivel can be attached to the dome to direct light where needed.

Mounting

Fixture can be surface mounted on a junction box on the wall.

Electrical

Total system wattage is 14 Watts. The standard unit has a high efficiency driver that operates at 120 - 277V as standard.

Arms

Available ARMS include:

- ARM1
- ARM2
- ARM3
- ARM4
- ARM5
- ARM6

Finish


Bronze, White, Black
Custom Colours optional

Options


- Globes
- Globe Guard
- Wire Cage (only applicable for LG4016)
- Swivel

| | |
|------------------------------|-------------------------|
| Equivalent to | 50W MH |
| Fixture Watts | 14W |
| Lumens | >1500 |
| Efficacy | >100 lm/w |
| LED Life | 100,000 hours |
| Certification | cCSAus |
| Colour Temperature | 5000K (standard) |
| Warranty | 5 Years |
| Operating temperature | -40°C to +40°C |


DIMENSIONS

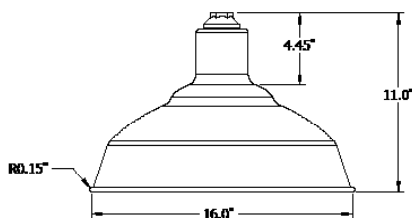


LG4016

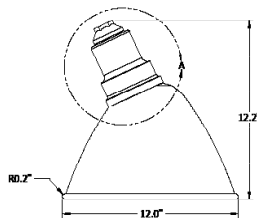

VCS212A

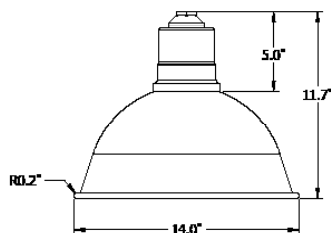


VCS214DM




VCS214A




ARMS & ACCESSORIES

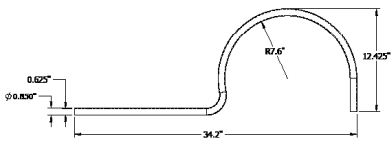


ARM 1

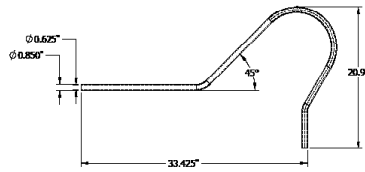


ARM 2




ARM 3

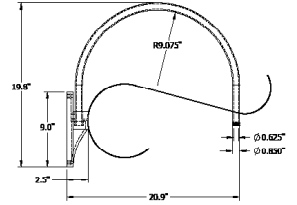

ARM 4

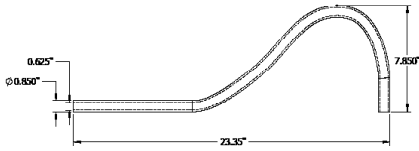


ARM 5



ARM 6



**Swivel
(Optional)**



**Wire Guard for
LG4016 Shade
(Optional)**

**Swivel is optional with ARM1, ARM2, ARM5 and ARM6

GLOBES & GUARDS



Red RGL100R #094206
 Blue RGL100B #094204
 Green RGL100G #094205
 GLASS Amber RGL100A #094203
 Frosted GL100F #008506
 Clear GL100 #008507
 Prismatic GL100PR #008505
 Guard GD100CGS #007839

ORDERING GUIDE

LED14

B

| Shades | Wattage | Voltage | Colour Temp. | Finish | Swivel | Arms | Globe |
|-----------|------------|--------------|--------------|---------------------|-------------------|------|----------------------------------|
| VCS212A | LED14* INC | B - 120-277V | 3K - 3000K | BLK - BLACK* | SW - SWIVEL MOUNT | ARM1 | GL100PR - PRISMATIC GLASS |
| VCS214DIM | | | 4K - 4000K | BRZ - BRONZE* | BLANK | ARM2 | GL100F - FROSTED GLASS |
| VCS214A | | | 5K - 5000K* | WHT - WHITE* | | ARM3 | GL100 - CLEAR GLASS |
| LG4015 | | | | CC - CUSTOM COLOUR* | | ARM4 | GL100 - CLEAR GLASS |
| | | | | | | ARM5 | RGL100A - AMBER |
| | | | | | | ARM6 | RGL100B - BLUE |
| | | | | | | | RGL100G- GREEN |
| | | | | | | | RGL100R -RED |
| | | | | | | | GL100PGO - POLYCARBONATE WHITE |
| | | | | | | | GD100CGS - GLOBE GUARD |
| | | | | | | | WG - WIRE GUARD FOR LG4016 SHADE |

* Standard configuration