



# DVCSX-LED14

## Pendant Mount LED Vapourproof



### IDEAL APPLICATIONS

- ✓ Entrances
- ✓ Stairways
- ✓ Elevator Shafts
- ✓ Restaurants
- ✓ Tunnels
- ✓ Service Areas

### DESCRIPTION:

The DVCSX-LED14 is a versatile fixture that can be used in industrial and architectural applications. The fixture is available in custom colors and has a variety of globe and guard accessories.

### FEATURES:

- Sleek, modern look with the same ruggedness as the original DVCS fixture.
- 10 minute retrofit. Retrofits to existing 4" round/octagon boxes.
- Polycarbonate lens can be easily replaced with glass globe and guard to provide a different look.
- Precision die cast aluminum housing with powder coat paint finish for industrial and architectural applications.
- Grey polyester powder coat paint finish for protection against oxidization
- Five 1/2" NPS conduit entries.

**Note:** Not for use in hazardous locations.

### SPECIFICATIONS

### DVCSX-LED14

Watts*	13.6W
Lumens*	1644 Lm
Efficacy *	120.5 Lm/W
Voltage	120-277V
Replaces Up To	100W Incandescent / 36W CFL Vaporproof Fixture
Colour Temp	5000K, 4000K, 3000K
Dimming	0-10V Dim to Off
PF*	0.96
CRI	83
LED Life (L70)	>54000 Hours
Temperature Rating	+40°C max ambient
Housing Material	Aluminum
Lens	Frosted Polycarbonate Lens
Mounting	Pendant Mount
Certifications	ETL, DLC 5.1 Standard

\*Tested data for 3000K



## ACCESSORIES

RAB Design carries a diverse line of durable and cost efficient glass globes. They come in various finishes, which include impregnated colors.

### GLASS GLOBES OPTIONS (SOLD SEPARATELY)



GL100  
CLEAR GLASS



GL100HR  
HEAT RESISTANT



GL100RIB  
RIBBED GLASS



GL100SB  
SANDBLASTED



RGL100A  
AMBER



RGL100B  
BLUE



RGL100G  
GREEN



RGL100R  
RED

### GD100CGS CAST GUARD (SOLD SEPARATELY)



#### FEATURES

- Heavy duty raw/painted cast guard for use with RAB Design Vapourproof fixtures.
- Machined threads for smooth fit to RAB Design fixtures.
- Set screw to lock guard securely to fixture.



DVCSX-LED14 shown with GD100CGS Cast Guard and GL100SB Sandblasted Globe.


**SPECIFICATIONS**

Model Number	Voltage (V)	Power (W)	Light Output (lm)	Efficacy (lm/W)	THD (%)	PF	CCT (K)	B-U-G
DVCSX-LED14-B-3K-DGY-DIM-FR-PM	120-277	13.51	1590	117.7	11.3	0.95	3000	84
DVCSX-LED14-B-4K-DGY-DIM-FR-PM	120-277	13.58	1617	119.1	10.2	0.96	4000	84

**LEGEND**


B- 120-277V  
3K - 3000K, 4K-4000K  
DGY - Dove Gray  
DIM - 0-10V Dimming  
FR - Frosted Lens  
PM - Pendant Mount

**DIMENSIONS**

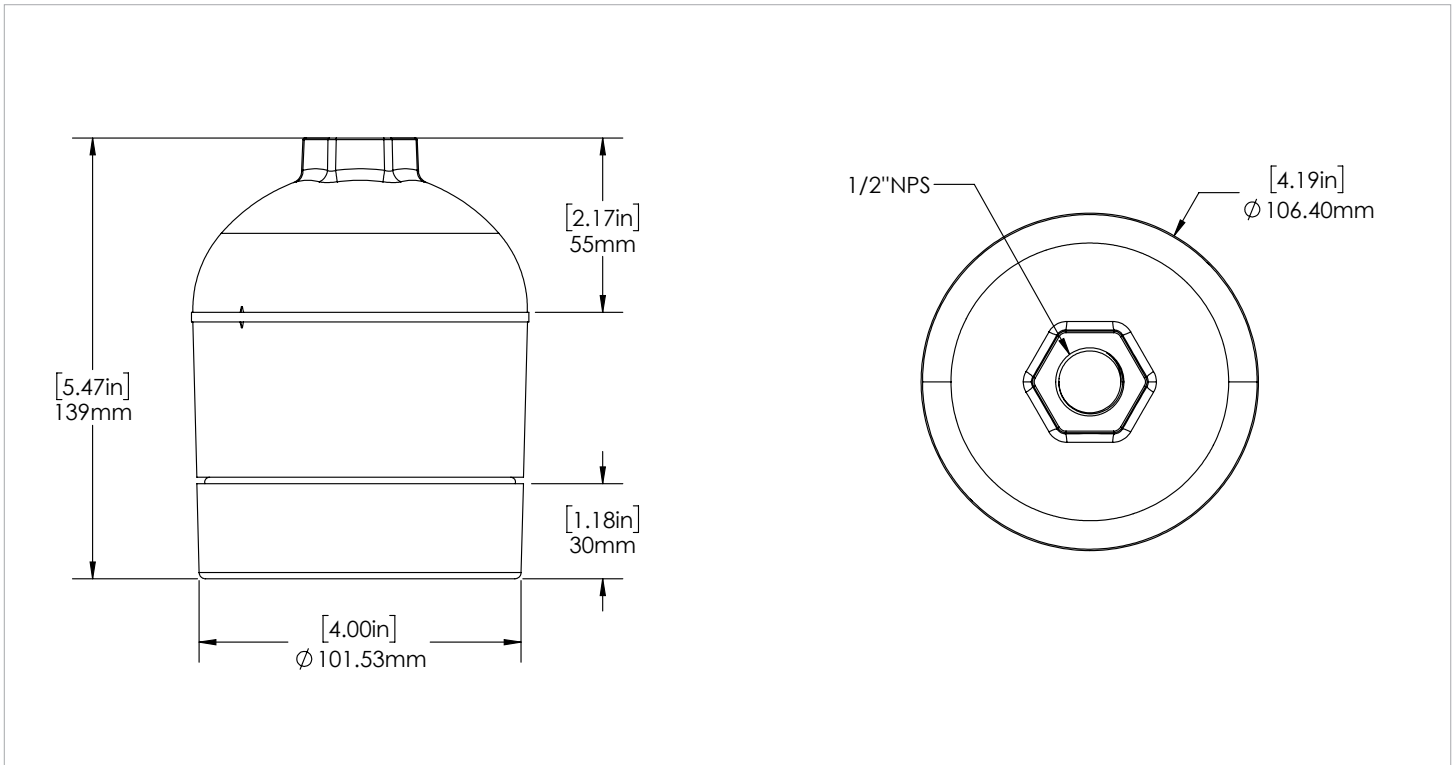

**MOUNTING OPTIONS**

This fixture series is also available in **ceiling mount** or **wall mount**.

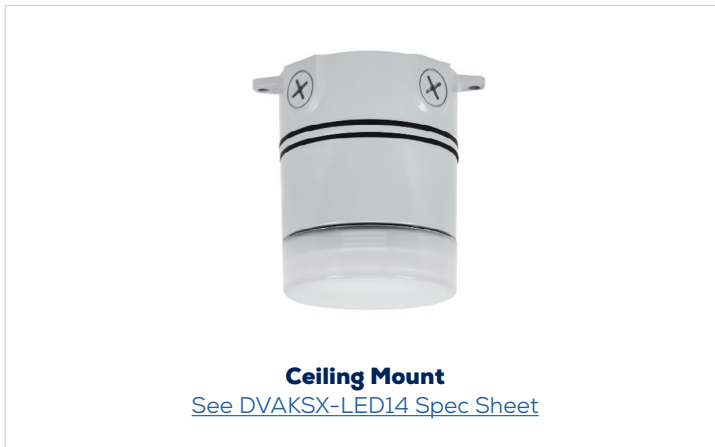

## ORDERING GUIDE:

DVCSX	LED14	B					DIM	FR	PM
Fixture	Wattage	Voltage	Colour Temp.	Finish	Dimming	Lens	Mounting		
	LED14	B - 120-277V	5K - 5000K* 4K - 4000K 3K - 3000K	DGY - Dove Grey* CC - Custom Colours	DIM - 0-10V Dimming	FR - Frosted Lens	PM - Pendant Mount		

\* Standard Configuration

### FIELD INSTALLED ACCESSORIES:

CHECK THE ACCESSORIES YOU WISH TO ORDER:



Cast Guard - Raw  
Finish GD100CGS



Cast Guard - Dove Gray  
Finish GD100CGS-DGY



GL100  
Clear Glass



GL100HR  
Heat Resistant



GL100RIB  
Ribbed Glass



GL100SB  
Sandblasted



RGL100A  
Amber



RGL100B  
Blue



RGL100G  
Green



RGL100R  
Red