



# LFX4-LED40

## Linear Vapourproof Fixture



### IDEAL APPLICATIONS

- Food Processing Industries
- Agricultural Applications
- Poultry Barns
- Industrial Applications

### DESCRIPTION:

New and improved IP66 linear vapourproof fixture that is rugged in design, with conduit entries on the back and the side for ease on installation.

### FEATURES:

#### Construction

Polycarbonate UV stabilized housing with opal lens. The lens attaches to the fixture using 6 stainless steel clips on either side. The LFX4-LED60 is ideal for mounting heights between 8' – 10' creating a wide even light distribution because of its rounded opal lens.

#### Lens

Fixture has a high grade polycarbonate lens that is UV stabilized.

#### LED information

The fixture contains a high efficiency LED strip that delivers a total output of 5,379 lumens at an efficacy of 134 lumens/watt. LEDs have a colour temperature of 4000K as standard, 5000K is available as an option.

#### Finish

Grey Polycarbonate Finish

#### Electrical

Total system wattage of the unit is 62W. The standard unit has a high efficiency driver that operates at 120 - 277V. 347V is available as an option.

#### Mounting

Fixture comes with 2 stainless steel mounting brackets that facilitate quick and easy mounting direct on the wall or ceiling. Additional mounting options include suspended chain mount.

There are 4 conduit entries on the bottom and one conduit entry on either side.

#### Options

- Integrated High Frequency Sensor
- Battery backup


### SPECIFICATIONS

### LFX4-LED40

Watts (W)	41
Equivalent to	> 3 lamp T5 fluorescent fixture
Lumens (Lm)	5,379
Voltage	120-277V, 347V
Efficacy (Lm/W)	134
Operating Temp.	-40°C to +40°C
Colour Temp.	4000K (standard) 5000K (option)
Dimming	0-10V Dim (10% to 100%)
CRI	>80
PF	0.9
THD	14.85%
LED Life	100,000 Hours
Finish	Grey
Certifications	UL, IP66, DLC Premium, NEMA 4X, NSF, Wet Locations, 5 Year Warranty



## DIMENSIONS:

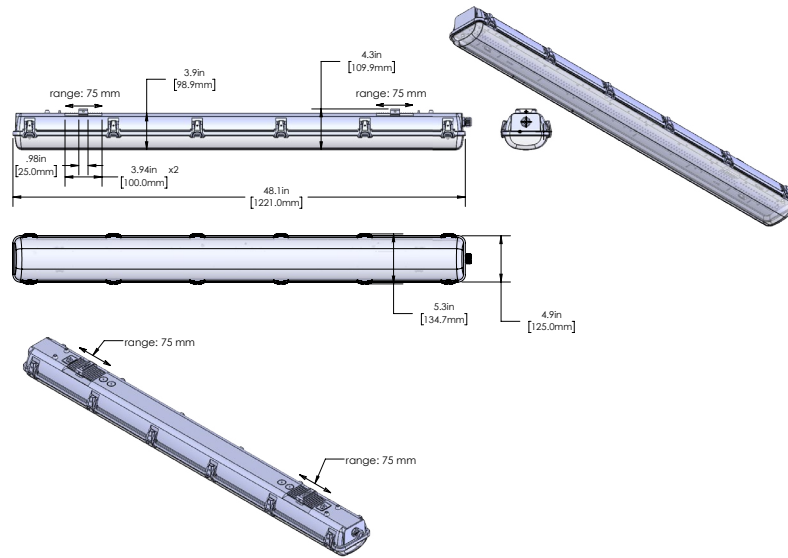


**NOTE:** Not for use in car wash facilities.

## EASY INSTALLATION:




1. Mount stainless steel clips on the surface

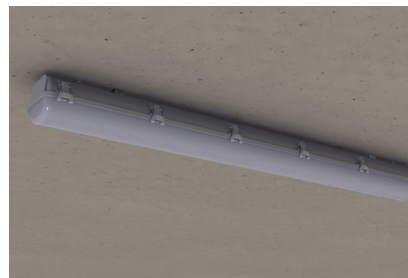

2. Mount fixture onto clips




3. Open up the lens by unhooking polycarbonate clips on one side

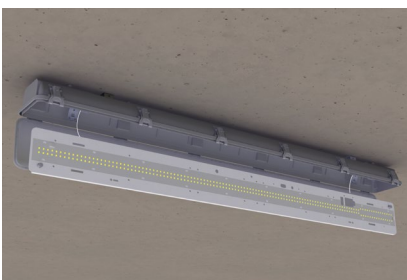

4. Remove LED tray using the pull tabs on either side of the fixture
5. Both tray and lens hang while tethered to the fixture using a clip and lock system.
6. Connect wires using quick connects




7. Reattach the tray to the fixture

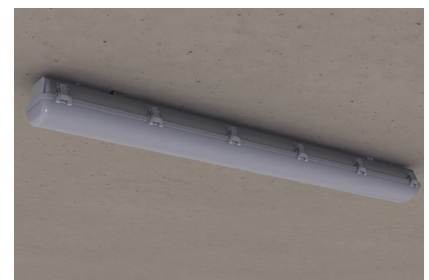

8. Reattach the lens to the fixture

## DHFS MOTION SENSOR



Dimming High Frequency Motion Sensor is factory installed.

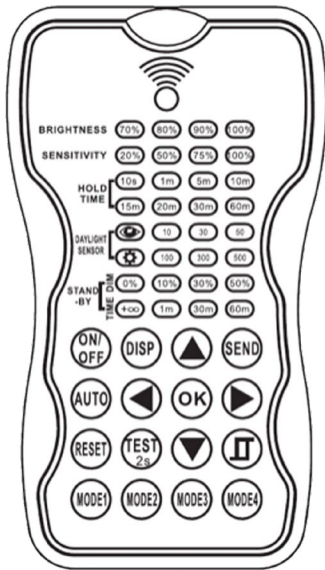

DEFAULT SENSOR SETTINGS					
BRIGHTNESS	SENSITIVITY	HOLD TIME	DAYLIGHT SENSOR	STAND-BY DIM	STAND-BY TIME
100%	100%	5 minutes	Disabled	DIM: 30%	60 minutes

DHFS SENSOR SPECIFICATIONS	
<b>POWER SUPPLY</b>	100-277 VAC, SINGLE PHASE, 60HZ 100-347 VAC, SINGLE PHASE, 60HZ 208/230/480 VAC, PHASE TO PHASE, 60HZ
<b>MAXIMUM LOAD</b>	100-120 VAC, 800W, TUNGSTEN 100-120 VAC, 800W, ELECTRONIC BALLAST/LED DRIVER 230-240 VAC, 300W, ELECTRONIC BALLAST/LED DRIVER 277 VAC, 1200W, ELECTRONIC BALLAST/LED DRIVER 347 VAC, 1200W, ELECTRONIC BALLAST/LED DRIVER 480 VAC, 480W, ELECTRONIC BALLAST/LED DRIVER
<b>HIGH FREQUENCY SYSTEM</b>	5.8GHZ +/-75MHZ
<b>DIM CONTROL OUTPUT</b>	0-10V DC DIMMING, 25MA
<b>DETECTION RADIUS/ANGLE</b>	MAX 8M (26FT) AT 360°
<b>MOUNTING HEIGHT</b>	MAX 6M (20FT)
<b>HUMIDITY</b>	MAX 95% RELATIVE HUMIDITY
<b>OPERATING TEMP.</b>	-40°C TO +70°C
<b>CYCLES</b>	200,000 ON/OFF CYCLES
<b>CERTIFICATIONS</b>	CRUUS, FCC
<b>PROGRAMMING</b>	WIRELESS PROGRAMMING USING RC-100 REMOTE

## DHFS DETECTION RANGE & RADIUS/ANGLE

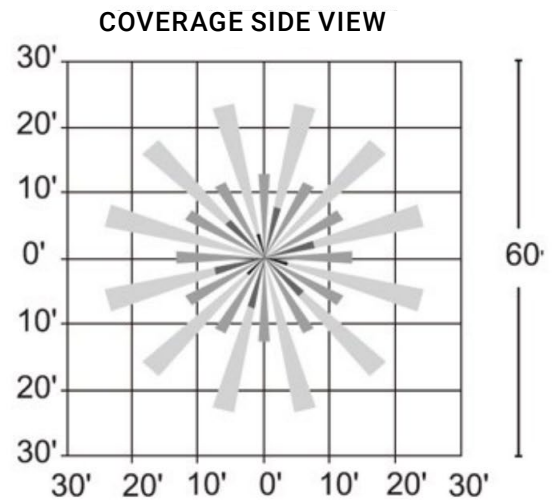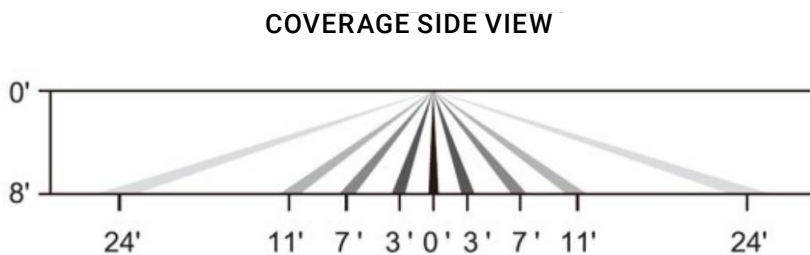

## ORDERING GUIDE:

Fixture	Wattage	Voltage	Colour Temp.	Finish	Dimming	Lighting Controls	NSF	NEMA4X	Battery Back Up
LFX4	LED40	B - 120-277V C - 347V*	4K - 4000K 5K - 5000K	GRY - Grey	DIM - 0-10V Dimming	Leave Blank-None*  DHFS** - Dimming High frequency motion sensor (can be set as ON/OFF)	FS - NSF Certified	N4X - NEMA4X	Leave Blank - No Battery Backup  BBK** - Battery Backup

\*\* Not DLC listed

### ORDERING GUIDE FOR ACCESSORIES

#### Options Sold Separately

Check the items that you wish to order:

087016 - RC100 Motion Sensor Remote Control