



The WRDS-LED is a decorative, energy efficient down light in a round cylindrical shape that can be used in a variety of commercial and residential applications.

APPLICATIONS

Ideal for retail buildings, schools, townhouse complexes and apartment buildings

Project	
Type	
Date	
Notes	

SPECIFICATIONS

Construction

The WRDS-LED24 is a decorative fixture with a die cast aluminum housing and a clear tempered glass lens held in place with a gasket, lens frame and three stainless steel screws.

Mounting

The fixture can be wall mounted to standard junction boxes. Unit can also be surface mounted with power from conduit entry

LED Configuration

The fixture delivers a total lumen output of 2445 lumens at an efficacy of 111 lumens/watt. The LEDs have a colour temperature of 5000K.

Electrical

Total system wattage of the unit is 22W. The standard unit has a high efficiency driver that operates at 120-277V.


Finish

Black powder coat paint finish.

Equivalent to	100W MH
Watts	22W
Lumens	2445
Efficacy	111 lumens/watt

LED Life	100,000 hours
Colour Temperature	5000K
Warranty	5 Years
Operating Temperature	-40° C to +40° C
Certification	cULus, DLC
Power Factor	0.9
CRI	>80
Total Harmonic Distortion	13.86%

DIMENSIONS

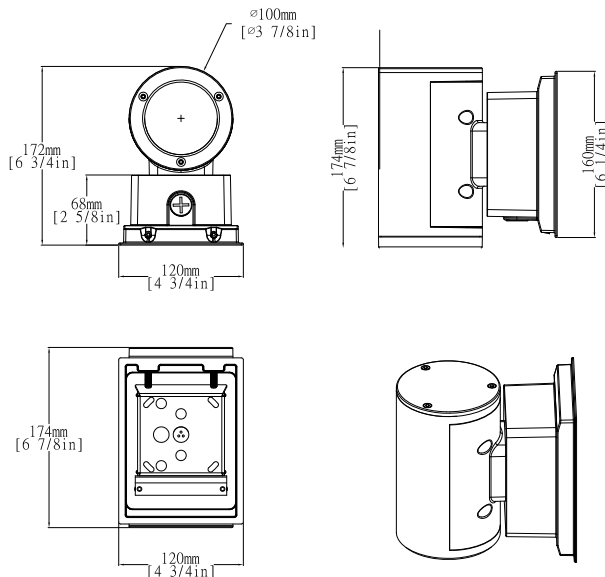

ORDERING GUIDE

WRDS	-	LED24	-		-		-	
-------------	---	--------------	---	--	---	--	---	--

VOLTAGE

COLOUR TEMP

FINISH

B - 120 - 277V*

5K - 5000K*

BLK - BLACK*

* Standard configuration

